

Delfino B
ECD:9/26/17

200 Park S

PO#856937
DID#1488910

Ver. 2/8/2017

CJ#819558

333-1729

CHARTER COMMUNICATIONS SCOPE OF WORK

Project Information (will populate into Contact Cost tab)

NAME:	JMK Consumer Growth Partners
ADDRESS:	200 Park Ave S NEW YORK 10003
LOB:	FIBER COMMERCIAL NEW BUILD
DOCKID:	1488910
DOC:	Yonina Swick (212) 400-6082 yswick@absre.com
MODE/HUB:	AE36 / HUB AE
OU:	C133
REC'D DATE:	Jun 26, 2017 (CST)

Serviceability Code

MTU, STU or NEX

BUILD TYPE

TENANT COUNT

WIDTH OF BLDG

NUMBER OF STORIES

BUILDING EXTERIOR FINISH

COMMON MPOE LOCATION

COMMON MPOE ACCESS SPECIFICS

PRIVATE NON-MPOE EQUIPMENT LOCATION

POWER IS IT AVAILABLE & WHERE

RACK or WALL MOUNT

SPACE AVAILABILITY FOR RACK/WALL MOUNT

CORES REQUIRED TO ENTER BLDG

PREBURY DROP

FIBER VERIFICATION COMPLETED BY

FIBER VERIFICATION COMPLETE DATE

MTU

WALKED BY: nylan

Jerry-Splicing
Alex- Fiber Pull



BUILDING ACCESS	NAME	PHONE #
NORMAL BUSINESS HOURS	Nick Heid	212-818-9052
AFTER HOURS	George Super	212-677-6240
EMERGENCY		

Project Description: Detail from Right Of Way to Interior D-Marc in or at the Venue.

IF MTU, detailed description MUST contain Entire Building Layout, Rack, and Power Locations


Lateral To Plant Access Point To Basement To Riser Entry:

200 Park Ave S is hot with both coax/fiber & the target client is JMK Consumer Growth Partners located on the 12th floor of the building in suite #1218 (space is currently vacant & under renovation). Proposed fiber the point is FDP-200PASK01 located along wall in the basement corridor near stairwell "A". From the the point, proposed fiber will run following the path shown in diagram through the basement corridor to the proposed riser up indication in the building's shaft located in stairwell "A" (access panels to shaft located on each floor). Proposed fiber is to riser up from the basement to the 12th floor of the building via the riser shaft in stairwell "A". - proposed fiber will exit the riser shaft in the 12th floor landing of stairwell "A" and proceed to run following yen route provided in the diagram through the 12th floor hung ceiling in corridor to the proposed core drill into the client's 12th floor space in suite #1218 where a proposed fiber is coil to be left - fiber will terminate at the client's eventual telco rack - space is currently vacant & under renovation).

SOW OVERALL	
DOCK #	1488910

Insert Field Map

First 3 pages are for Field map. Followed by 3 more pages for Interior, exterior, rack/wall mount pictures.

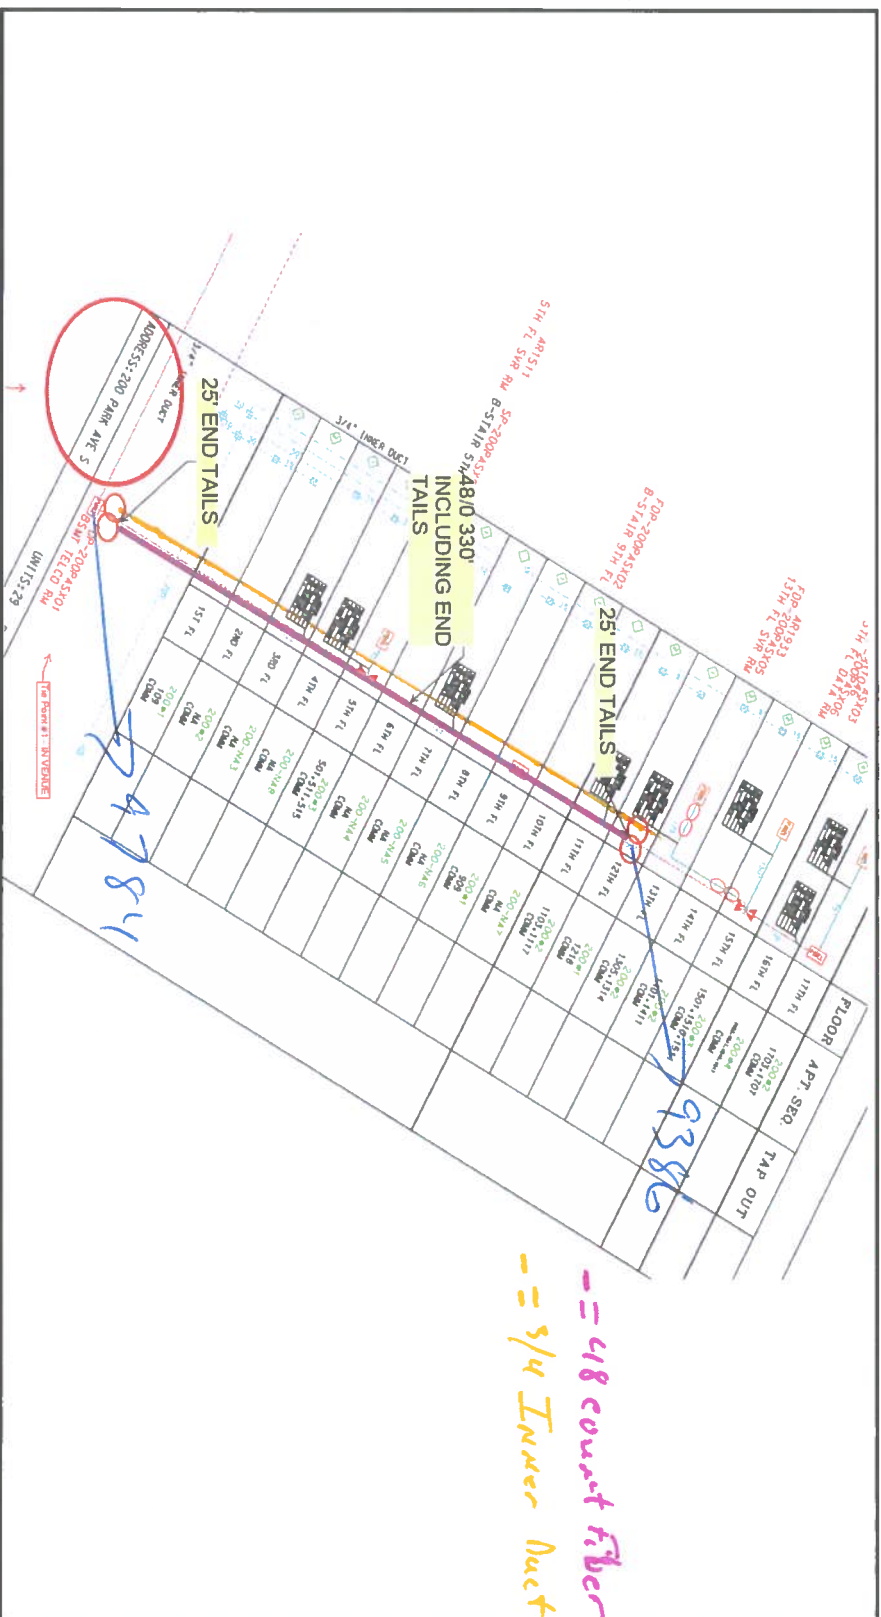

- 48 count fiber
- 3/4 Inner duct



